
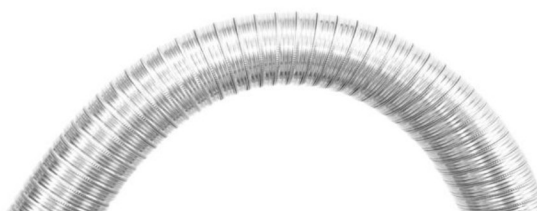


TUBO FLEXIBLE ALUMINIO EXTRACCION - CONDUCCIÓN

REF.	MEDIDA Ø mm.	TIRA/CAJA	M./CAJA
9530_001	100	20	100
9530_002	110	16	80
9530_003	120	12	60
9530_004	125	12	60
9530_005	130	12	60
9530_006	140	9	45
9530_007	150	9	45
9530_008	160	9	45
9530_009	180	6	30
9530_010	200	4	20
9530_011	250	2	10
9530_012	300	1	5
9530_013	350	1	5
9530_014	400	1	5
9530_015	450	1	5
9530_016	500	1	5

LARGO ESTANDAR 5 METROS COMPACTADO A 1 METRO.

Reemplazar _ por 1 para Aluminio y 2 para blanco.

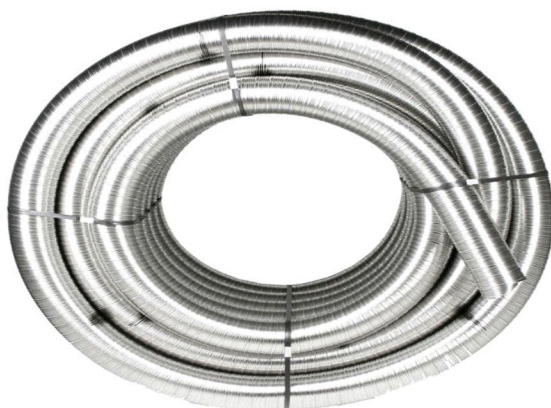

TUBO FLEXIBLE ACERO INOXIDABLE 316 DOBLE CAPA

REF.	MEDIDA Ø mm.	METROS ROLLO	ESPESOR MM
95304001	80	30	0,10
95304002	100	30	0,10
95304003	125	30	0,10
95304004	150	30	0,10
95304005	180	30	0,10
95304006	200	30	0,10

Chimenea metálica flexible para evacuación de humos y gases de los productos de la combustión de doble capa fabricada en acero inoxidable

Presión máxima: 300 mm C.E.
Velocidad máxima del aire: 30 m/s